
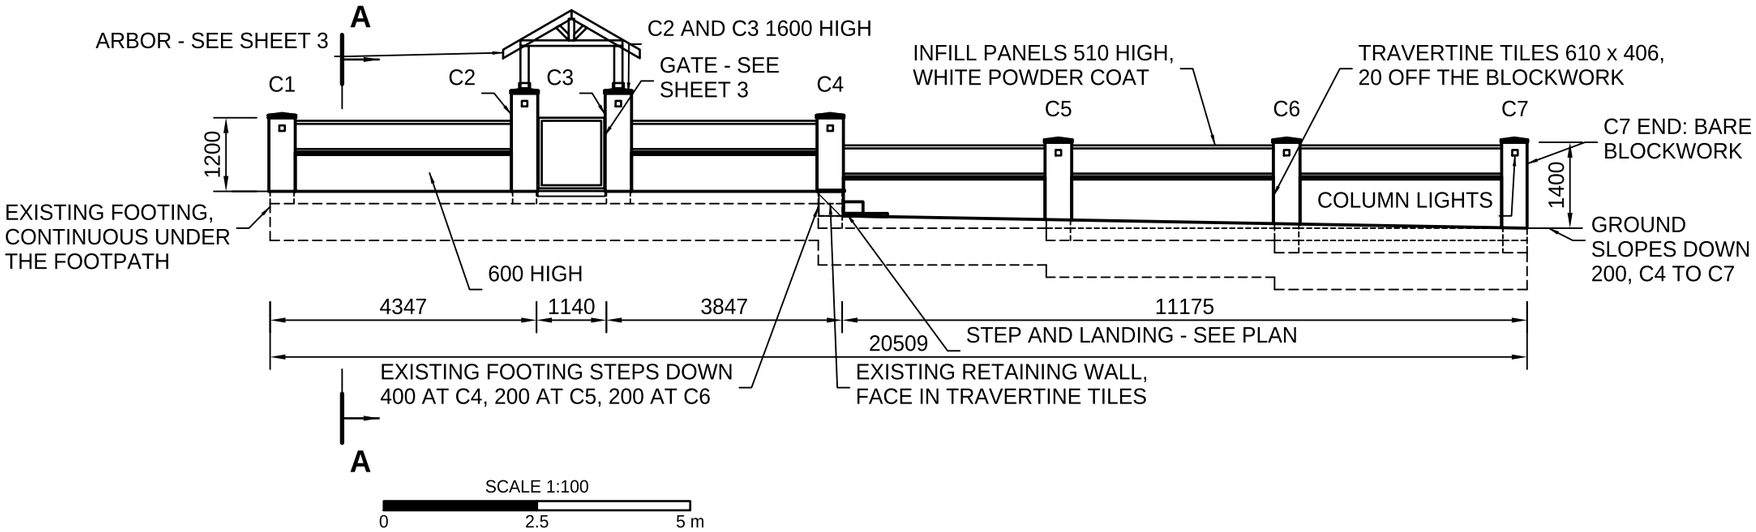


ELEVATION FROM THE BACK 1:100

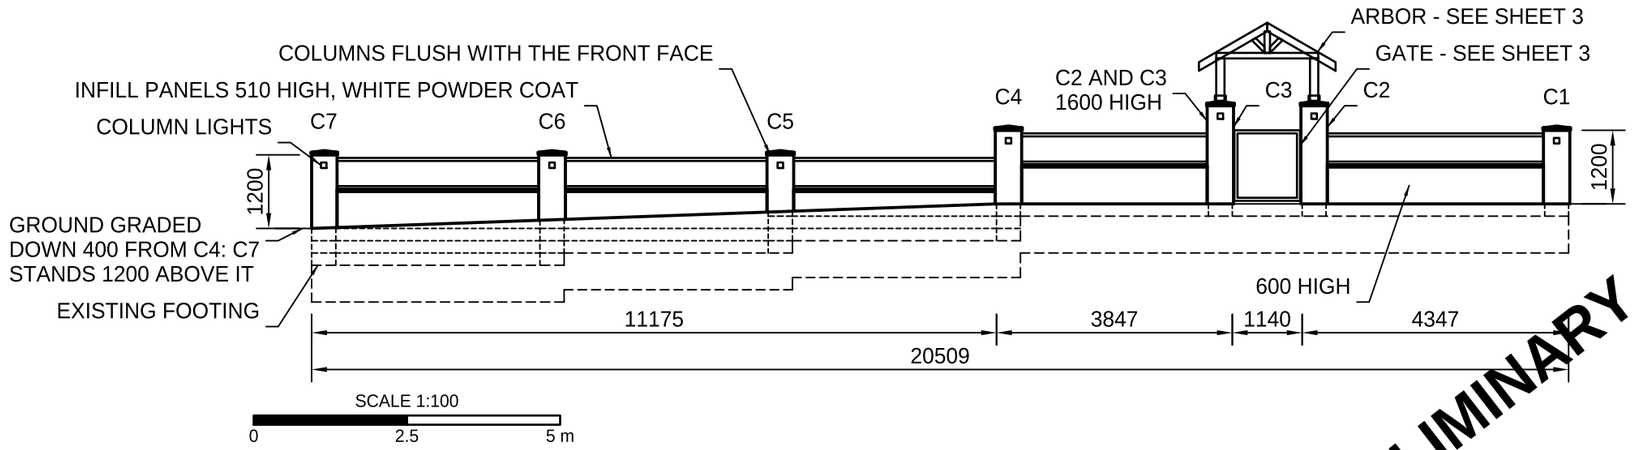

ELEVATION FROM THE FRONT 1:100

DO NOT SCALE - USE FIGURED DIMENSIONS. DIMENSIONS IN MILLIMETRES, LEVELS IN METRES.

NOTES - REV H

1. 200 SERIES HOLLOW CONCRETE BLOCKS (390 x 190 x 190); 7 COLUMNS 390 x 390 (C5, C6, C7 395 ALONG THE WALL, AS BUILT). LENGTHS TO THE BLOCKWORK; SET-OUT ON SHEET 2.
2. WALLS BETWEEN COLUMNS: 3567 (C1-C2), 3067 (C3-C4), 3 x 3330 (C4-C7). OPENING 1140 BETWEEN BLOCK FACES, 1100 BETWEEN TILE FACES. 11175 FROM THE BLOCK FACE OF C4 TO THE BARE END OF C7.
3. COLUMNS FLUSH WITH THE FRONT FACE, 200 PROUD AT THE BACK.
4. TRAVERTINE TILES (CLASSIC TRAVERTINE 610 x 406 x 12 OR EQUAL) ON 8 OF ADHESIVE, 20 BUILD-UP, BRICK PATTERN, ON EVERY FACE ABOVE GROUND EXCEPT THE FAR END OF C7; CORNERS CUT AND BUTTED. WALLS FINISH 230 THICK, COLUMNS 430. CAPPING 250 x 40; COLUMN CAPS 450 SQUARE, SHALLOW PYRAMIDS RISING 30, FLAT SEAT 150 SQUARE UNDER THE ARBOR POSTS ON C2 AND C3.
5. REV H: C2 AND C3 AS BUILT, 20 BACK FROM THE 1100 PATH (OPENING 1140, CLEAR 1100, GATE 1070); TILE IN PLACE OF REV G'S DRY STACK. FLAT 600 x 85 TRAVERTINE ON THE PATH, RETAINING WALL TOP, STEP AND LANDING.
6. EXISTING POURED: THE FOOTING (NO UPRIGHT BARS SHOT YET), THE FOOTPATH AND THE RETAINING WALL. N12 UPRIGHTS AT 400 CENTRES UP THE CORES.
7. PANELS, GATE, ARBOR AND LIGHTS: SEE SHEET 3. PANELS ARE SHOWN AS THEIR FRAME; THE FOOTING AND BURIED COURSES ARE DASHED.
8. THE FRONT ELEVATION IS DRAWN AS SEEN FROM THE FRONT: C7 ON THE LEFT.
9. ITEMS MARKED TO CONFIRM (SHEETS 2 AND 3) ARE DRAWN FOR SHAPE ONLY.

PRELIMINARY - FOR CERTIFICATION

REV	DATE	DESCRIPTION	BY
A	05 NOV 2026	FIRST DRAFT FOR REVIEW	BD
B	05 NOV 2026	RIGHT OF C4: WALL TOP DOWN 400, FOOTING STEPS AT C5 AND C6, GROUND FALLS TO C7	BD
C	05 NOV 2026	GROUND DROPS 400 AT C4 (EXISTING RETAINING WALL), LEVEL TO C7; FOOTING STEPS 400 AT C4	BD
D	05 NOV 2026	FOOTING RUNS ON UNDER FOOTPATH; GROUND SLOPES 200 C4 TO C7; BURIED COURSES DASHED	BD
E	05 NOV 2026	LENGTHS: C1-C2 4350, C3-C4 3850, C4-C7 11200; C5 AND C6 EQUALLY SPACED	BD
F	06 NOV 2026	REDRAWN TO THE 3D MODEL ON 3 SHEETS: TILES, PANELS, GATE, ARBOR, STEP; C2, C3 1600	BD
G	08 NOV 2026	DRY STACK STONE FOR TILES, 40 BUILD-UP; C2, C3 OUT 23; OPENING 1180; PYRAMID CAPS	BD
H	11 NOV 2026	TRAVERTINE TILE 610 x 406, 20 BUILD-UP; C2, C3 AS BUILT: OPENING 1140; CAPS 450	BD

COMPANY
BONVILLE FORESTRY AND EXCAVATIONS PTY LTD
CLIENT
CLIENT NOT YET GIVEN
SITE
SITE ADDRESS NOT YET GIVEN

TITLE
BLOCK WALL - SHEET 1 OF 3
ELEVATIONS FROM THE BACK AND FRONT
PROJECT
BLOCK WALL WITH ENGAGED COLUMNS
DRAFT - NOT FOR CONSTRUCTION - 11 NOV 2026

DRAWN	CHECKED	DATE	SCALE	SIZE	DRAWING No	REV
BD	NOT YET	11 NOV 2026	AS SHOWN @ A3	A3	**BW01-1**	**H**