
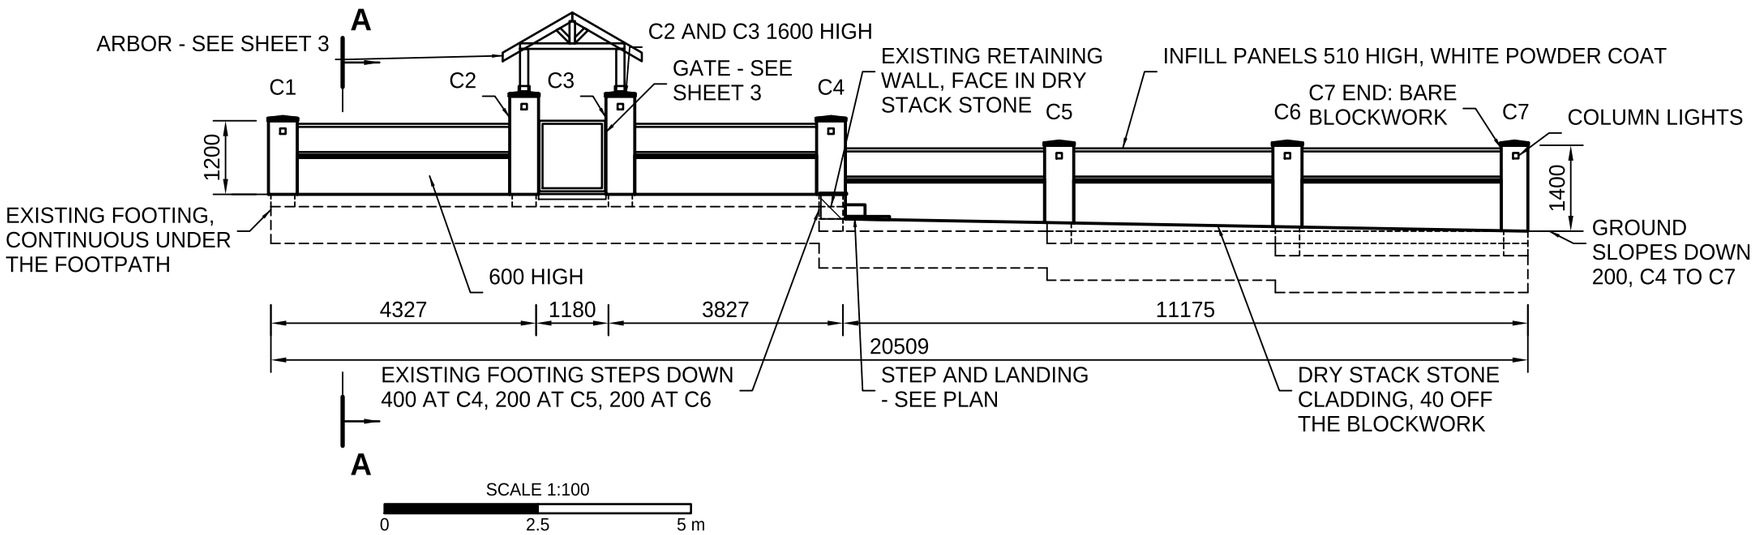


ELEVATION FROM THE BACK 1:100

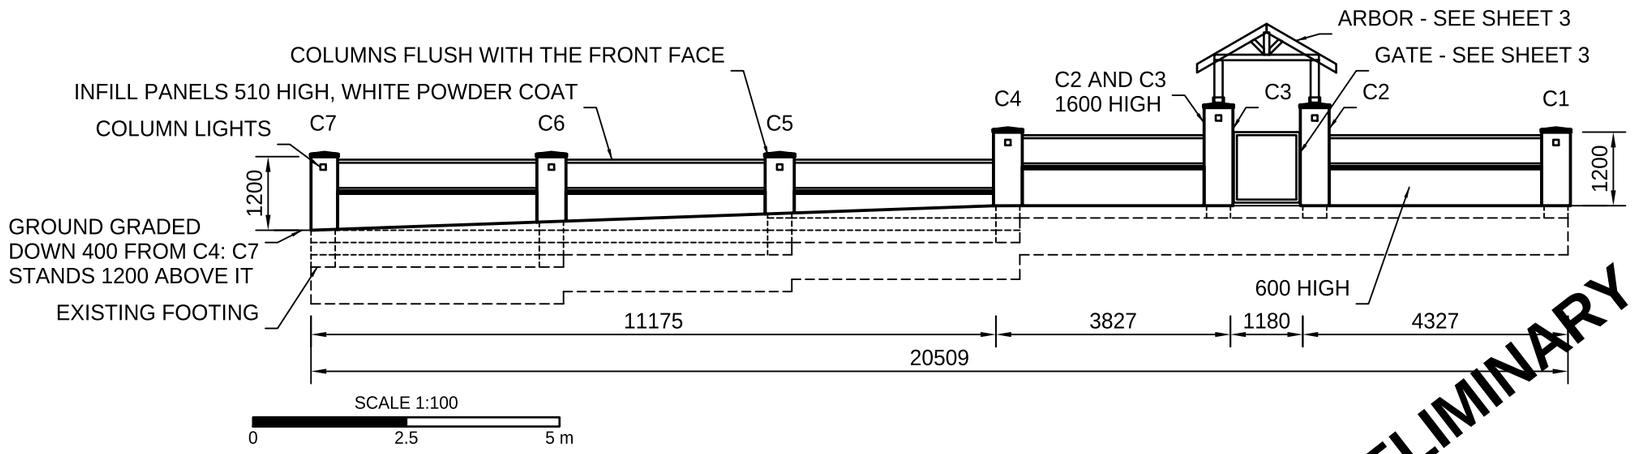

ELEVATION FROM THE FRONT 1:100

DO NOT SCALE - USE FIGURED DIMENSIONS. DIMENSIONS IN MILLIMETRES, LEVELS IN METRES.

NOTES - REV G

1. 200 SERIES HOLLOW CONCRETE BLOCKS (390 x 190 x 190); 7 COLUMNS 390 x 390, C1 TO C7. LENGTHS ARE TO THE BLOCKWORK UNLESS NOTED; SET-OUT ON SHEET 2.
2. WALLS BETWEEN COLUMNS: 3547 (C1-C2), 3047 (C3-C4), 3 x 3330 (C4-C7). OPENING 1180 BETWEEN BLOCK FACES, 1100 BETWEEN STONE FACES. 11175 FROM THE BLOCK FACE OF C4 TO THE BARE END OF C7.
3. COLUMNS FLUSH WITH THE FRONT FACE, 200 PROUD AT THE BACK.
4. DRY STACK STONE CLADDING (VENEER STONE DRY STACK COLLECTION OR EQUAL): WEBBED PANELS 25-35 THICK ON 5 OF DARK ADHESIVE, 40 BUILD-UP, ON EVERY FACE ABOVE GROUND EXCEPT THE FAR END OF C7; PREFABRICATED CORNERS AT EVERY OUTSIDE CORNER. WALLS FINISH 270 THICK, COLUMNS 470 MATCHING CAPPING 290 x 40 ON THE WALLS, COLUMN CAPS 490 SQUARE, SHALLOW PYRAMIDS RISING 30, WITH A FLAT SEAT 150 SQUARE UNDER THE ARBOR POSTS ON C2 AND C3.
5. REV G IS THE DRY STACK VERSION OF REV F (TRAVERTINE TILES 75 x 150): C2 AND C3 MOVED OUT 23 EACH SO THE CLEAR OPENING STAYS 1100 AND THE GATE 1070. THE FLAT 600 x 850 TRAVERTINE STAYS ON THE FOOTPATH, THE RETAINING WALL TOP, THE STEP AND THE LANDING.
6. EXISTING, POURED: THE FOOTING (NO UPRIGHT BARS IN IT YET), THE FOOTPATH AND THE RETAINING WALL. N12 UPRIGHTS AT 400 CENTRES UP THE CORES.
7. PANELS, GATE, ARBOR AND LIGHTS: SEE SHEET 3. PANELS ARE SHOWN AS THEIR FRAME; THE FOOTING AND BURIED COURSES ARE DASHED.
8. THE FRONT ELEVATION IS DRAWN AS SEEN FROM THE FRONT: C7 ON THE LEFT.
9. ITEMS MARKED TO CONFIRM (SHEETS 2 AND 3) ARE DRAWN FOR SHAPE ONLY.

PRELIMINARY - FOR CERTIFICATION

REV	DATE	DESCRIPTION	BY
A	05 NOV 2026	FIRST DRAFT FOR REVIEW	BD
B	05 NOV 2026	RIGHT OF C4: WALL TOP DOWN 400, FOOTING STEPS AT C5 AND C6, GROUND FALLS TO C7	BD
C	05 NOV 2026	GROUND DROPS 400 AT C4 (EXISTING RETAINING WALL), LEVEL TO C7; FOOTING STEPS 400 AT C4	BD
D	05 NOV 2026	FOOTING RUNS ON UNDER FOOTPATH; GROUND SLOPES 200 C4 TO C7; BURIED COURSES DASHED	BD
E	05 NOV 2026	LENGTHS: C1-C2 4350, C3-C4 3850, C4-C7 11200; C5 AND C6 EQUALLY SPACED	BD
F	06 NOV 2026	REDRAWN TO THE 3D MODEL ON 3 SHEETS: TILES, PANELS, GATE, ARBOR, STEP; C2, C3 1600	BD
G	08 NOV 2026	DRY STACK STONE FOR TILES, 40 BUILD-UP; C2, C3 OUT 23; OPENING 1180; PYRAMID CAPS	BD

COMPANY
BONVILLE FORESTRY AND EXCAVATIONS PTY LTD
CLIENT
CLIENT NOT YET GIVEN
SITE
SITE ADDRESS NOT YET GIVEN

TITLE
BLOCK WALL - SHEET 1 OF 3
ELEVATIONS FROM THE BACK AND FRONT
PROJECT
BLOCK WALL WITH ENGAGED COLUMNS
DRAFT - NOT FOR CONSTRUCTION - 08 NOV 2026

DRAWN	CHECKED	DATE	SCALE	SIZE	DRAWING No	REV
BD	NOT YET	08 NOV 2026	AS SHOWN @ A3	A3	**BW01-1**	**G**