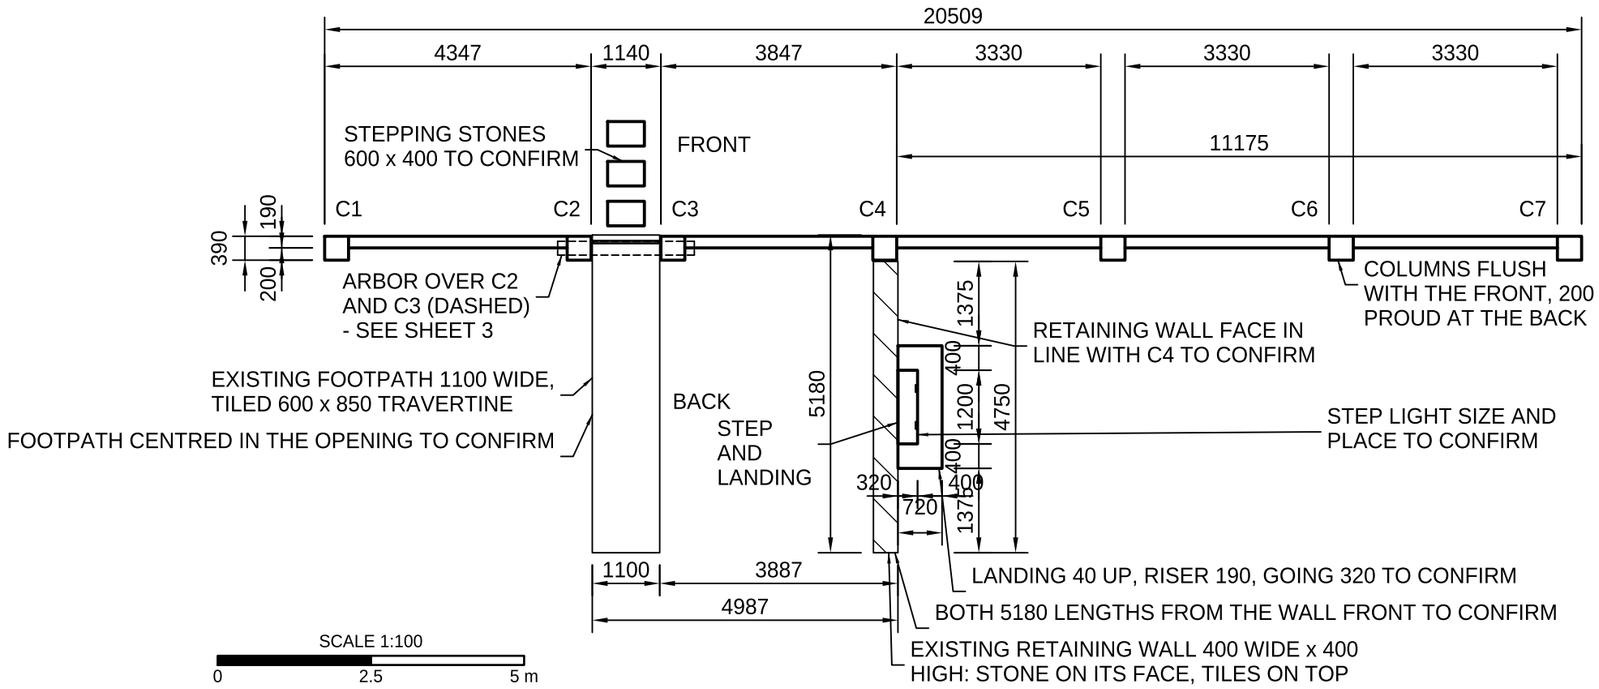


PLAN FROM ABOVE 1:100

SCHEDULE OF MATERIALS - REV H

1. 312 (344) - 200 SERIES BLOCKS 390 x 190 x 190
2. 41 - N12 UPRIGHTS AT 400 CENTRES IN WALLS, 58.1 m
3. 34.96 m2 (38.46 m2) - WALL TILES, TRAVERTINE 610 x 406 x 12
4. 3.54 m2 (3.89 m2) - FLAT TILES, TRAVERTINE 600 x 850
5. 34.96 m2 - TILE ADHESIVE, WALL TILES
6. 3.54 m2 - TILE GLUE FOR THE FLAT TILES
7. 16.42 m (18.07 m) - CAPPING TO THE WALLS, 250 WIDE *
8. 7 - COLUMN CAPS, 450 SQUARE, LOW PYRAMID *
9. 5 - INFILL PANELS, VERTICAL SLATS: 1 AT 3527 x 510, 1 AT 3027 x 510, 3 AT 3290 x 510
10. 1 - GATE TO MATCH, 1070 x 1150
11. 2 - ARBOR POSTS 135 x 135, 691 LONG
12. 1 - COLLAR TIE 135 x 90 *, 1665 LONG
13. 1 - KING POST 135 x 90 *, 352 LONG
14. 4 - CROSSMEMBERS 140 x 45 *, 1287 LONG
15. 1 - RIDGE BOARD 140 x 45 *, 225 LONG
16. 2 - STRUTS 135 x 70 *, 346 LONG
17. 2 - POST SUPPORTS, T-BLADE
18. 14 - COLUMN LIGHTS
19. 2 - STEP LIGHTS, RECESSED
20. 3 - STEPPING STONES 600 x 400 *
21. NET FIRST, NET BRACKETS TO ORDER: +10%. * SIZE TO CONFIRM
22. COUNTING, TO CONFIRM: BLOCKS 12.5 TO THE m2 FOOTING TO TOP + 2 A COURSE A COLUMN; BARS IN WALLS, 100 ABOVE THE FOOTING, NO COGS OR LAPS.
23. WALL TILES: WALL FACES, COLUMNS, RETAINING WALL FACE, STEP RISER, NET (NONE AT C7'S BARE END). FLAT TILES: RETAINING WALL TOP, STEP, LANDING.
24. NOT COUNTED: MORTAR, CORE FILL, COLUMN STEEL, STEP CORE, FIXINGS, HINGES, LATCH, WIRING, PAINT, THE BUILT FOOTING, PATH, RETAINING WALL.

TO CONFIRM ON SITE

STEP LIGHT SIZE AND PLACE
LANDING 40 UP, RISER 190, GOING 320
STEPPING STONES 600 x 400
FOOTPATH CENTRED IN THE OPENING
RETAINING WALL FACE IN LINE WITH C4
BOTH 5180 LENGTHS FROM THE WALL FRONT

PRELIMINARY - FOR CERTIFICATION

REV	DATE	DESCRIPTION	BY
F	06 NOV 2026	NEW SHEET IN THE REV F SET: PLAN AND SCHEDULE OF MATERIALS, FROM THE 3D MODEL	BD
G	08 NOV 2026	DRY STACK STONE IN PLACE OF TILES; C2, C3 OUT 23; SCHEDULE REWORKED FOR THE STONE	BD
H	11 NOV 2026	TRAVERTINE TILE 610 x 406 AT 20; OPENING 1140 AS BUILT; SCHEDULE FOR THE TILES	BD

COMPANY
BONVILLE FORESTRY AND EXCAVATIONS PTY LTD
CLIENT
CLIENT NOT YET GIVEN
SITE
SITE ADDRESS NOT YET GIVEN

TITLE
BLOCK WALL - SHEET 2 OF 3
PLAN AND SCHEDULE OF MATERIALS
PROJECT
BLOCK WALL WITH ENGAGED COLUMNS
DRAFT - NOT FOR CONSTRUCTION - 11 NOV 2026

DRAWN	CHECKED	DATE	SCALE	SIZE	DRAWING No	REV
BD	NOT YET	11 NOV 2026	AS SHOWN @ A3	A3	**BW01-2**	**H**

DO NOT SCALE - USE FIGURED DIMENSIONS. DIMENSIONS IN MILLIMETRES, LEVELS IN METRES.