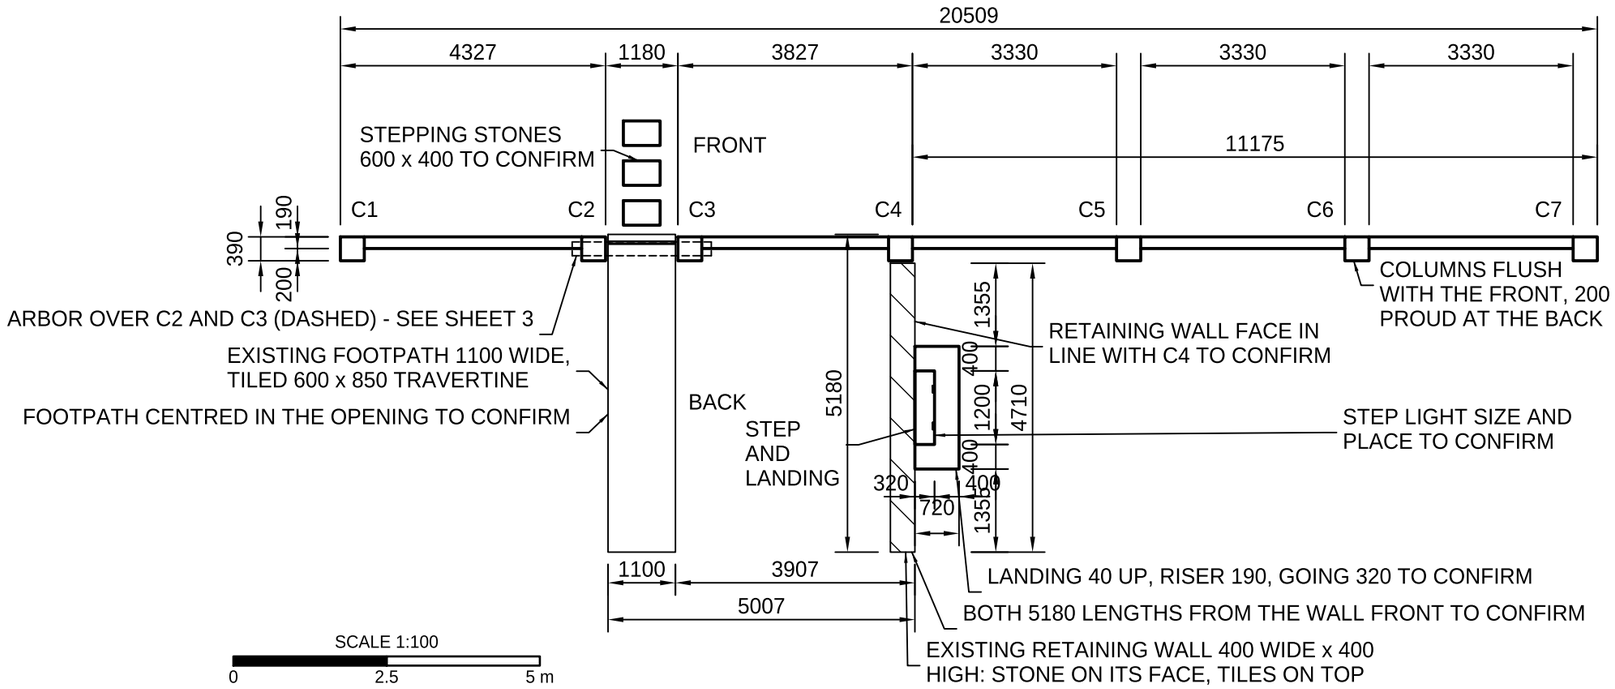


PLAN FROM ABOVE 1:100

SCHEDULE OF MATERIALS - REV G

1. 311 (343) - 200 SERIES BLOCKS 390 x 190 x 190
2. 41 - N12 UPRIGHTS AT 400 CENTRES IN WALLS, 58.1 m
3. 29.86 m2 (34.33 m2 = 63 BOXES) - DRY STACK STONE
4. 29.74 m (34.20 m = 35 BOXES) - DRY STACK CORNERS
5. 3.52 m2 (3.87 m2) - FLAT TILES, TRAVERTINE 600 x 850
6. 35.80 m2 - DARK ADHESIVE, STONE (DRY JOINT)
7. 3.52 m2 - TILE GLUE FOR THE FLAT TILES
8. 16.18 m (17.80 m) - CAPPING TO THE WALLS, 290 WIDE *
9. 7 - COLUMN CAPS, 490 SQUARE, LOW PYRAMID *
10. 5 - INFILL PANELS, VERTICAL SLATS: 1 AT 3467 x 510, 1 AT 2967 x 510, 3 AT 3250 x 510
11. 1 - GATE TO MATCH, 1070 x 1150
12. 2 - ARBOR POSTS 135 x 135, 691 LONG
13. 1 - COLLAR TIE 135 x 90 *, 1705 LONG
14. 1 - KING POST 135 x 90 *, 363 LONG
15. 4 - CROSSMEMBERS 140 x 45 *, 1311 LONG
16. 1 - RIDGE BOARD 140 x 45 *, 225 LONG
17. 2 - STRUTS 135 x 70 *, 356 LONG
18. 2 - POST SUPPORTS, T-BLADE
19. 14 - COLUMN LIGHTS
20. 2 - STEP LIGHTS, RECESSED
21. 3 - STEPPING STONES 600 x 400 *
22. NET FIRST, TO BRACKETS TO ORDER: +10%, STONE +15% IN WHOLE BOXES. * SIZE TO CONFIRM.
23. COUNTING, TO CONFIRM: BLOCKS 12.5 TO THE m2 FOOTING TO TOP + 2 A COURSE A COLUMN; BARS IN WALLS, 100 ABOVE THE FOOTING, NO COGS OR LAPS.
24. STONE (BODIES): WALL FACES, COLUMNS, RETAINING WALL FACE, STEP RISER; = FACE LESS 0.2 m2 A METRE OF CORNERS (NONE AT C7'S BARE END). FLAT TILES: RETAINING WALL TOP, STEP, LANDING.
25. NOT COUNTED: MORTAR, CORE FILL, COLUMN STEEL, STEP CORE, FIXINGS, HINGES, LATCH, WIRING, PAINT, THE BUILT FOOTING, PATH, RETAINING WALL.

TO CONFIRM ON SITE

STEP LIGHT SIZE AND PLACE
LANDING 40 UP, RISER 190, GOING 320
STEPPING STONES 600 x 400
FOOTPATH CENTRED IN THE OPENING
RETAINING WALL FACE IN LINE WITH C4
BOTH 5180 LENGTHS FROM THE WALL FRONT

PRELIMINARY - FOR CERTIFICATION

REV	DATE	DESCRIPTION	BY
F	06 NOV 2026	NEW SHEET IN THE REV F SET: PLAN AND SCHEDULE OF MATERIALS, FROM THE 3D MODEL	BD
G	08 NOV 2026	DRY STACK STONE IN PLACE OF TILES; C2, C3 OUT 23; SCHEDULE REWORKED FOR THE STONE	BD

COMPANY
BONVILLE FORESTRY AND EXCAVATIONS PTY LTD
CLIENT
CLIENT NOT YET GIVEN
SITE
SITE ADDRESS NOT YET GIVEN

TITLE
BLOCK WALL - SHEET 2 OF 3
PLAN AND SCHEDULE OF MATERIALS
PROJECT
BLOCK WALL WITH ENGAGED COLUMNS
DRAFT - NOT FOR CONSTRUCTION - 08 NOV 2026

DRAWN	CHECKED	DATE	SCALE	SIZE	DRAWING No	REV
BD	NOT YET	08 NOV 2026	AS SHOWN @ A3	A3	**BW01-2**	**G**

DO NOT SCALE - USE FIGURED DIMENSIONS. DIMENSIONS IN MILLIMETRES, LEVELS IN METRES.